


## » 离合式定扭风批构造图




## » 枪型离合式定扭风批

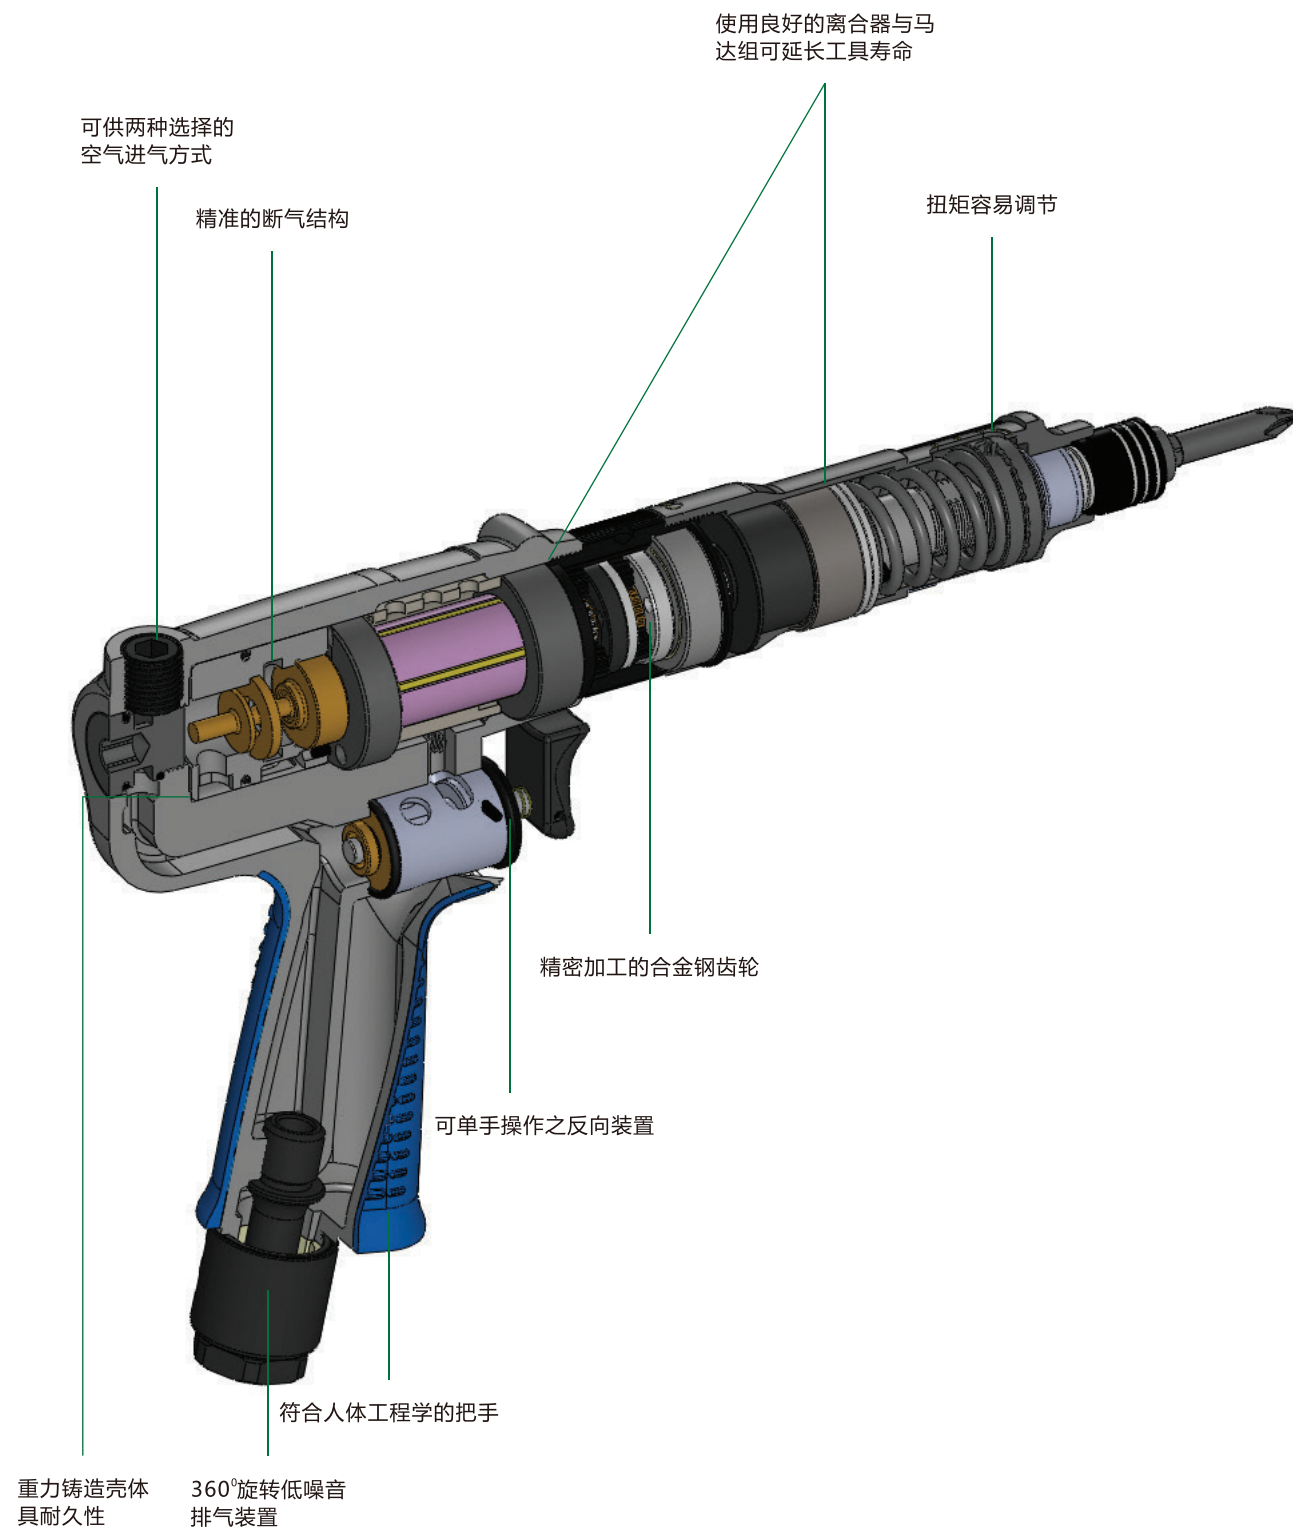

## » 技术参数

| 型号         | 夹头尺寸     | 螺栓能力    | 扭矩范围      |            | 空转速度  | 重量   | 进气口尺寸 | 噪音 | 平均耗气量  |         |
|------------|----------|---------|-----------|------------|-------|------|-------|----|--------|---------|
|            | in       | mm      | N.m       | in-lb      | rpm   | Kg   | in    | dB | m³/min | ft³/min |
| NWGA-0407  | 1/4" Hex | M2      | 0.4 – 0.7 | 3.5 – 6.2  | 1,500 | 0.70 | 1/4"  | 72 | 0.2    | 7       |
| NWGA-0410  | 1/4" Hex | M2      | 0.4 – 1   | 3.5 – 8.8  | 1,100 | 0.70 | 1/4"  | 72 | 0.2    | 7       |
| NWGB-0713  | 1/4" Hex | M2 – M3 | 0.7 – 1.3 | 6.2 – 11.5 | 1,600 | 0.90 | 1/4"  | 75 | 0.34   | 12      |
| NWGB-0720  | 1/4" Hex | M3      | 0.7 – 2   | 6.2 – 17.7 | 900   | 0.90 | 1/4"  | 75 | 0.34   | 12      |
| NWGD-0723H | 1/4" Hex | M3      | 0.7 – 2.3 | 6.2 – 20   | 3,500 | 1.08 | 1/4"  | 75 | 0.76   | 27      |
| NWGD-0830H | 1/4" Hex | M3 – M4 | 0.8 – 3   | 7.1 – 27   | 3,000 | 1.08 | 1/4"  | 75 | 0.76   | 27      |
| NWGD-0845H | 1/4" Hex | M3 – M4 | 0.8 – 4.5 | 7.1 – 40   | 2,000 | 1.08 | 1/4"  | 75 | 0.76   | 27      |
| NWGD-1260  | 1/4" Hex | M3 – M5 | 1.2 – 6   | 10.6 – 53  | 1,100 | 1.08 | 1/4"  | 75 | 0.76   | 27      |
| NWGE-4090  | 1/4" Hex | M4 – M5 | 4 – 9     | 35 – 80    | 700   | 1.24 | 1/4"  | 75 | 0.76   | 27      |
| NWGE-40110 | 1/4" Hex | M4 – M6 | 4 – 11    | 35 – 97    | 500   | 1.24 | 1/4"  | 75 | 0.76   | 27      |
| NWGF-70140 | 1/4" Hex | M5 – M6 | 7 – 14    | 62 – 124   | 550   | 1.53 | 1/4"  | 80 | 0.98   | 35      |
| NWGG-90180 | 1/4" Hex | M6 – M8 | 9 – 18    | 80 – 159   | 380   | 1.53 | 1/4"  | 80 | 0.98   | 35      |

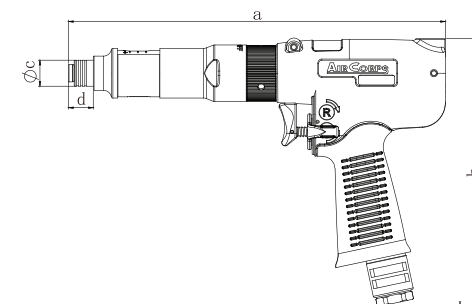

| 型号     | a(mm) | b(mm) | c(mm) | d(mm) |
|--------|-------|-------|-------|-------|
| NWGA系列 | 218   | 162.3 | φ 16  | 16    |
| NWGB系列 | 211   | 162.3 | φ 16  | 16    |
| NWGD系列 | 197.5 | 180   | φ 16  | 15    |
| NWGE系列 | 228   | 180   | φ 16  | 15    |
| NWGF系列 | 234   | 186   | φ 16  | 15    |
| NWGG系列 | 234   | 186   | φ 16  | 15    |

直型离合式定扭风批（扳机式）



NWSA 系列



NWSB 系列



NWSC 系列




NWSD/NWSE 系列



NWSF/NWSG 系列

技术参数

| 型号         | 夹头尺寸     | 螺栓能力    | 扭矩范围      |            | 空转速度  | 重量   | 进气口尺寸 | 噪音 | 平均耗气量  |         |
|------------|----------|---------|-----------|------------|-------|------|-------|----|--------|---------|
|            | in       | mm      | N.m       | in-lb      | rpm   | Kg   | in    | dB | m³/min | ft³/min |
| NWSA-0407  | 1/4" Hex | M2      | 0.4 – 0.7 | 3.5 – 6.2  | 1,500 | 0.41 | 1/8"  | 73 | 0.2    | 7       |
| NWSA-0410  | 1/4" Hex | M2      | 0.4 – 1   | 3.5 – 8.8  | 1,100 | 0.41 | 1/8"  | 73 | 0.2    | 7       |
| NWSB-0713  | 1/4" Hex | M2 – M3 | 0.7 – 1.3 | 6.2 – 11.5 | 1,600 | 0.63 | 1/8"  | 75 | 0.34   | 12      |
| NWSB-0720  | 1/4" Hex | M3      | 0.7 – 2   | 6.2 – 17.7 | 900   | 0.63 | 1/8"  | 75 | 0.34   | 12      |
| NWSC-0525  | 1/4" Hex | M2 – M3 | 0.5 – 2.5 | 4.4 – 22   | 2,000 | 0.72 | 1/8"  | 81 | 0.28   | 10      |
| NWSC-0835  | 1/4" Hex | M3 – M4 | 0.8 – 3.5 | 7.1 – 31   | 1,300 | 0.72 | 1/8"  | 81 | 0.28   | 10      |
| NWSC-0845  | 1/4" Hex | M3 – M4 | 0.8 – 4.5 | 7.1 – 40   | 1,000 | 0.72 | 1/8"  | 81 | 0.28   | 10      |
| NWSC-0850  | 1/4" Hex | M3 – M5 | 0.8 – 5   | 7.1 – 44   | 750   | 0.72 | 1/8"  | 81 | 0.28   | 10      |
| NWSD-0723H | 1/4" Hex | M3      | 0.7 – 2.3 | 6.2 – 20   | 3,500 | 0.88 | 1/4"  | 78 | 0.42   | 15      |
| NWSD-0830H | 1/4" Hex | M3 – M4 | 0.8 – 3   | 7.1 – 27   | 3,000 | 0.88 | 1/4"  | 78 | 0.42   | 15      |
| NWSD-0845H | 1/4" Hex | M3 – M4 | 0.8 – 4.5 | 7.1 – 40   | 2,000 | 0.88 | 1/4"  | 78 | 0.42   | 15      |
| NWSD-1260  | 1/4" Hex | M3 – M5 | 1.2 – 6   | 10.6 – 53  | 1,100 | 0.88 | 1/4"  | 78 | 0.42   | 15      |
| NWSE-4090  | 1/4" Hex | M4 – M5 | 4 – 9     | 35 – 80    | 700   | 1.03 | 1/4"  | 78 | 0.42   | 15      |
| NWSE-40110 | 1/4" Hex | M4 – M6 | 4 – 11    | 35 – 97    | 500   | 1.03 | 1/4"  | 78 | 0.42   | 15      |
| NWSF-70140 | 1/4" Hex | M5 – M6 | 7 – 14    | 62 – 124   | 550   | 1.37 | 1/4"  | 83 | 0.48   | 17      |
| NWSG-90180 | 1/4" Hex | M6 – M8 | 9 – 18    | 80 – 159   | 380   | 1.37 | 1/4"  | 83 | 0.48   | 17      |

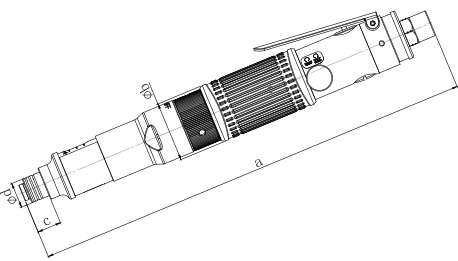

| 型号     | a(mm) | b(mm)  | c(mm) | d(mm) |
|--------|-------|--------|-------|-------|
| NWSA系列 | 238   | φ 26   | φ 16  | 16    |
| NWSB系列 | 246   | φ 31.5 | φ 16  | 16    |
| NWSC系列 | 241   | φ 36   | φ 16  | 15    |
| NWSD系列 | 254   | φ 39   | φ 16  | 15    |
| NWSE系列 | 284   | φ 39   | φ 16  | 15    |
| NWSF系列 | 308   | φ 45   | φ 16  | 15    |
| NWSG系列 | 308   | φ 45   | φ 16  | 15    |

直型离合式定扭风批（下压式）



NWPA 系列



NWPB 系列



NWPC 系列




NWPD/NWPE 系列



NWPF/NWPG 系列

技术参数


| 型号         | 夹头尺寸     | 螺栓能力    | 扭矩范围      |            | 空转速度  | 重量   | 进气口尺寸 | 噪音 | 平均耗气量  |         |
|------------|----------|---------|-----------|------------|-------|------|-------|----|--------|---------|
|            | in       | mm      | N.m       | in-lb      | rpm   | Kg   | in    | dB | m³/min | ft³/min |
| NWPA-0407  | 1/4" Hex | M2      | 0.4 – 0.7 | 3.5 – 6.2  | 1,500 | 0.35 | 1/8"  | 73 | 0.2    | 7       |
| NWPA-0410  | 1/4" Hex | M2      | 0.4 – 1   | 3.5 – 8.8  | 1,100 | 0.35 | 1/8"  | 73 | 0.2    | 7       |
| NWPB-0713  | 1/4" Hex | M2 – M3 | 0.7 – 1.3 | 6.2 – 11.5 | 1,600 | 0.60 | 1/8"  | 75 | 0.34   | 12      |
| NWPB-0720  | 1/4" Hex | M3      | 0.7 – 2   | 6.2 – 17.7 | 900   | 0.60 | 1/8"  | 75 | 0.34   | 12      |
| NWPC-0525  | 1/4" Hex | M2 – M3 | 0.5 – 2.5 | 4.4 – 22   | 2,000 | 0.68 | 1/8"  | 79 | 0.28   | 10      |
| NWPC-0835  | 1/4" Hex | M3 – M4 | 0.8 – 3.5 | 7.1 – 31   | 1,300 | 0.68 | 1/8"  | 79 | 0.28   | 10      |
| NWPC-0845  | 1/4" Hex | M3 – M4 | 0.8 – 4.5 | 7.1 – 40   | 1,000 | 0.68 | 1/8"  | 79 | 0.28   | 10      |
| NWPC-0850  | 1/4" Hex | M3 – M5 | 0.8 – 5   | 7.1 – 44   | 750   | 0.68 | 1/8"  | 79 | 0.28   | 10      |
| NWPD-0723H | 1/4" Hex | M3      | 0.7 – 2.3 | 6.2 – 20   | 3,500 | 0.84 | 1/4"  | 78 | 0.45   | 16      |
| NWPD-0830H | 1/4" Hex | M3 – M4 | 0.8 – 3   | 7.1 – 27   | 3,000 | 0.84 | 1/4"  | 78 | 0.45   | 16      |
| NWPD-0845H | 1/4" Hex | M3 – M4 | 0.8 – 4.5 | 7.1 – 40   | 2,000 | 0.84 | 1/4"  | 78 | 0.45   | 16      |
| NWPD-1260  | 1/4" Hex | M3 – M5 | 1.2 – 6   | 10.6 – 53  | 1,100 | 0.84 | 1/4"  | 78 | 0.45   | 16      |
| NWPE-4090  | 1/4" Hex | M4 – M5 | 4 – 9     | 35 – 80    | 700   | 0.98 | 1/4"  | 78 | 0.45   | 16      |
| NWPE-40110 | 1/4" Hex | M4 – M6 | 4 – 11    | 35 – 97    | 500   | 0.98 | 1/4"  | 78 | 0.45   | 16      |
| NWPF-70140 | 1/4" Hex | M5 – M6 | 7 – 14    | 62 – 124   | 550   | 1.29 | 1/4"  | 82 | 0.56   | 20      |
| NWPG-90180 | 1/4" Hex | M6 – M8 | 9 – 18    | 80 – 159   | 380   | 1.29 | 1/4"  | 82 | 0.56   | 20      |

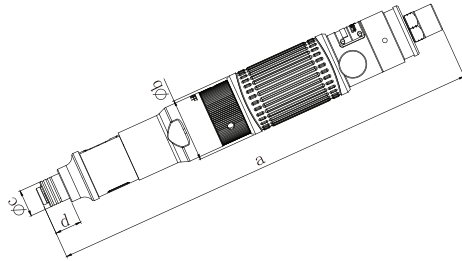

| 型号     | a(mm) | b(mm)  | c(mm) | d(mm) |
|--------|-------|--------|-------|-------|
| NWPA系列 | 216.1 | φ 26   | φ 16  | 16    |
| NWPB系列 | 229.1 | φ 31.5 | φ 16  | 16    |
| NWPC系列 | 225   | φ 36   | φ 16  | 15    |
| NWPD系列 | 242   | φ 39   | φ 16  | 15    |
| NWPE系列 | 272   | φ 39   | φ 16  | 15    |
| NWPF系列 | 295   | φ 45   | φ 16  | 15    |
| NWPG系列 | 295   | φ 45   | φ 16  | 15    |

» 离合式定扭风批（弯头式）

NEW

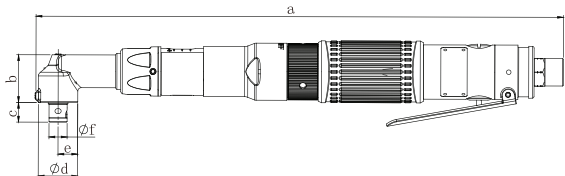

| 型号        | a(mm) | b(mm) | c(mm) | d(mm) | e(mm) |
|-----------|-------|-------|-------|-------|-------|
| NWAA系列    | 284.1 | 30    | 11.5  | 12    | φ 11  |
| NWAB系列    | 290.5 | 30    | 11.5  | 12    | φ 11  |
| NWAC系列    | 292   | 33    | 17    | 13.5  | φ 16  |
| NWAC-2R系列 | 292   | 33    | 13    | 13.5  | 1/4"  |
| NWAC-3R系列 | 292   | 33    | 14    | 13.5  | 3/8"  |
| NWAD系列    | 306   | 33    | 17    | 13.5  | φ 16  |
| NWAD-2R系列 | 306   | 33    | 13    | 13.5  | 1/4"  |
| NWAD-3R系列 | 306   | 33    | 14    | 13.5  | 3/8"  |
| NWAE系列    | 336   | 33    | 17    | 13.5  | φ 16  |
| NWAE-2R系列 | 336   | 33    | 13    | 13.5  | 1/4"  |
| NWAE-3R系列 | 336   | 33    | 14    | 13.5  | 3/8"  |
| NWAF-3R系列 | 336   | 38    | 14    | 16    | 3/8"  |
| NWAG-3R系列 | 336   | 38    | 14    | 16    | 3/8"  |
| NWAH-3R系列 | 408   | 34    | 15    | 18.5  | 3/8"  |
| NWAH-4R系列 | 408   | 34    | 19    | 18.5  | 1/2"  |
| NWAI-3R系列 | 408   | 34    | 15    | 18.5  | 3/8"  |
| NWAI-4R系列 | 408   | 34    | 19    | 18.5  | 1/2"  |

» 技术参数

| 型号             | 夹头尺寸     | 螺栓能力      | 扭矩范围      |            | 空转速度 | 重量   | 进气口尺寸 | 噪音 | 平均耗气量  |         |
|----------------|----------|-----------|-----------|------------|------|------|-------|----|--------|---------|
|                | in       | mm        | N.m       | in-lb      | rpm  | Kg   | in    | dB | m³/min | ft³/min |
| NWAA-0407      | 1/4" Hex | M2        | 0.4 – 0.7 | 3.5 – 6.2  | 1500 | 0.56 | 1/8"  | 73 | 0.2    | 7       |
| NWAA-0410      | 1/4" Hex | M2        | 0.4 – 1   | 3.5 – 8.8  | 1100 | 0.56 | 1/8"  | 73 | 0.2    | 7       |
| NWAB-0713      | 1/4" Hex | M2 – M3   | 0.7 – 1.3 | 6.2 – 11.5 | 1600 | 0.80 | 1/8"  | 75 | 0.34   | 12      |
| NWAB-0720      | 1/4" Hex | M3        | 0.7 – 2   | 6.2 – 17.7 | 900  | 0.80 | 1/8"  | 75 | 0.34   | 12      |
| NWAC-1035      | 1/4" Hex | M3 – M4   | 1 – 3.5   | 8.8 – 31   | 1300 | 0.98 | 1/8"  | 81 | 0.28   | 10      |
| NWAC-1035-2R   | 1/4" Sq  | M3 – M4   | 1 – 3.5   | 8.8 – 31   | 1300 | 0.98 | 1/8"  | 81 | 0.28   | 10      |
| NWAC-1035-3R   | 3/8" Sq  | M3 – M4   | 1 – 3.5   | 8.8 – 31   | 1300 | 0.98 | 1/8"  | 81 | 0.28   | 10      |
| NWAC-1445      | 1/4" Hex | M3 – M5   | 1.4 – 4.5 | 12.4 – 40  | 800  | 0.98 | 1/8"  | 81 | 0.28   | 10      |
| NWAC-1445-2R   | 1/4" Sq  | M3 – M5   | 1.4 – 4.5 | 12.4 – 40  | 800  | 0.98 | 1/8"  | 81 | 0.28   | 10      |
| NWAC-1445-3R   | 3/8" Sq  | M3 – M5   | 1.4 – 4.5 | 12.4 – 40  | 800  | 0.98 | 1/8"  | 81 | 0.28   | 10      |
| NWAC-1460      | 1/4" Hex | M3 – M5   | 1.4 – 6   | 12.4 – 53  | 650  | 0.98 | 1/8"  | 81 | 0.28   | 10      |
| NWAC-1460-2R   | 1/4" Sq  | M3 – M5   | 1.4 – 6   | 12.4 – 53  | 650  | 0.98 | 1/8"  | 81 | 0.28   | 10      |
| NWAC-1460-3R   | 3/8" Sq  | M3 – M5   | 1.4 – 6   | 12.4 – 53  | 650  | 0.98 | 1/8"  | 81 | 0.28   | 10      |
| NWAC-1470      | 1/4" Hex | M3 – M5   | 1.4 – 7   | 12.4 – 62  | 500  | 0.98 | 1/8"  | 81 | 0.28   | 10      |
| NWAC-1470-2R   | 1/4" Sq  | M3 – M5   | 1.4 – 7   | 12.4 – 62  | 500  | 0.98 | 1/8"  | 81 | 0.28   | 10      |
| NWAC-1470-3R   | 3/8" Sq  | M3 – M5   | 1.4 – 7   | 12.4 – 62  | 500  | 0.98 | 1/8"  | 81 | 0.28   | 10      |
| NWAD-1230H     | 1/4" Hex | M3 – M4   | 1.2 – 3   | 10.6 – 27  | 2200 | 1.14 | 1/4"  | 78 | 0.42   | 15      |
| NWAD-1230H-2R  | 1/4" Sq  | M3 – M4   | 1.2 – 3   | 10.6 – 27  | 2200 | 1.14 | 1/4"  | 78 | 0.42   | 15      |
| NWAD-1230H-3R  | 3/8" Sq  | M3 – M4   | 1.2 – 3   | 10.6 – 27  | 2200 | 1.14 | 1/4"  | 78 | 0.42   | 15      |
| NWAD-1440H     | 1/4" Hex | M3 – M4   | 1.4 – 4   | 12.4 – 35  | 1900 | 1.14 | 1/4"  | 78 | 0.42   | 15      |
| NWAD-1440H-2R  | 1/4" Sq  | M3 – M4   | 1.4 – 4   | 12.4 – 35  | 1900 | 1.14 | 1/4"  | 78 | 0.42   | 15      |
| NWAD-1440H-3R  | 3/8" Sq  | M3 – M4   | 1.4 – 4   | 12.4 – 35  | 1900 | 1.14 | 1/4"  | 78 | 0.42   | 15      |
| NWAD-1465H     | 1/4" Hex | M3 – M5   | 1.4 – 6.5 | 12.4 – 58  | 1300 | 1.14 | 1/4"  | 78 | 0.42   | 15      |
| NWAD-1465H-2R  | 1/4" Sq  | M3 – M5   | 1.4 – 6.5 | 12.4 – 58  | 1300 | 1.14 | 1/4"  | 78 | 0.42   | 15      |
| NWAD-1465H-3R  | 3/8" Sq  | M3 – M5   | 1.4 – 6.5 | 12.4 – 58  | 1300 | 1.14 | 1/4"  | 78 | 0.42   | 15      |
| NWAD-2080      | 1/4" Hex | M4 – M5   | 2 – 8     | 17.7 – 71  | 700  | 1.14 | 1/4"  | 78 | 0.42   | 15      |
| NWAD-2080-2R   | 1/4" Sq  | M4 – M5   | 2 – 8     | 17.7 – 71  | 700  | 1.14 | 1/4"  | 78 | 0.42   | 15      |
| NWAD-2080-3R   | 3/8" Sq  | M4 – M5   | 2 – 8     | 17.7 – 71  | 700  | 1.14 | 1/4"  | 78 | 0.42   | 15      |
| NWAE-60120     | 1/4" Hex | M5 – M6   | 6 – 12    | 53 – 106   | 480  | 1.28 | 1/4"  | 78 | 0.42   | 15      |
| NWAE-60120-2R  | 1/4" Sq  | M5 – M6   | 6 – 12    | 53 – 106   | 480  | 1.28 | 1/4"  | 78 | 0.42   | 15      |
| NWAE-60120-3R  | 3/8" Sq  | M5 – M6   | 6 – 12    | 53 – 106   | 480  | 1.28 | 1/4"  | 78 | 0.42   | 15      |
| NWAE-60150     | 1/4" Hex | M5 – M6   | 6 – 15    | 53 – 133   | 320  | 1.28 | 1/4"  | 78 | 0.42   | 15      |
| MWAE-60150-2R  | 1/4" Sq  | M5 – M6   | 6 – 15    | 53 – 133   | 320  | 1.28 | 1/4"  | 78 | 0.42   | 15      |
| NWAE-60150-3R  | 3/8" Sq  | M5 – M6   | 6 – 15    | 53 – 133   | 320  | 1.28 | 1/4"  | 78 | 0.42   | 15      |
| NWAF-100180-3R | 3/8" Sq  | M6 – M8   | 10 – 18   | 89 – 160   | 400  | 1.75 | 1/4"  | 83 | 0.48   | 17      |
| NWAG-140240-3R | 3/8" Sq  | M8        | 14 – 24   | 124 – 212  | 270  | 1.75 | 1/4"  | 83 | 0.48   | 17      |
| NWAH-240450-3R | 3/8" Sq  | M8 – M10  | 24 – 45   | 212 – 400  | 120  | 2.03 | 1/4"  | 83 | 0.48   | 17      |
| NWAH-240450-4R | 1/2" Sq  | M8 – M10  | 24 – 45   | 212 – 400  | 120  | 2.03 | 1/4"  | 83 | 0.48   | 17      |
| NWAI-350600-3R | 3/8" Sq  | M10 – M12 | 35 – 60   | 310 – 530  | 100  | 2.03 | 1/4"  | 83 | 0.48   | 17      |
| NWAI-350600-4R | 1/2" Sq  | M10 – M12 | 35 – 60   | 310 – 530  | 100  | 2.03 | 1/4"  | 83 | 0.48   | 17      |